



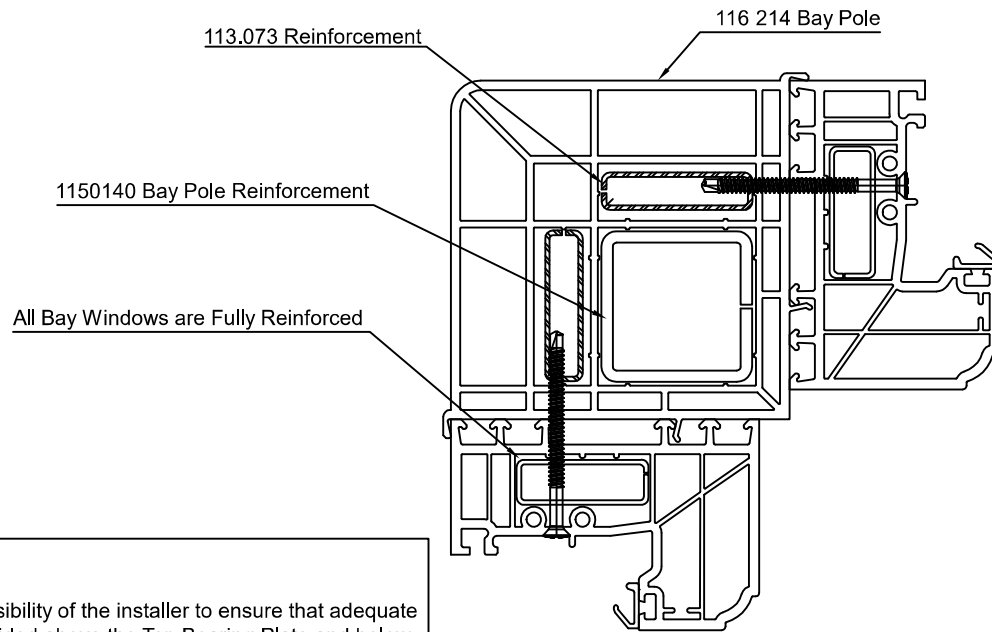


IMPORTANT

It is the responsibility of the installer to ensure that adequate support is provided above the Top Bearing Plate and below the Base Plate for the proposed installation

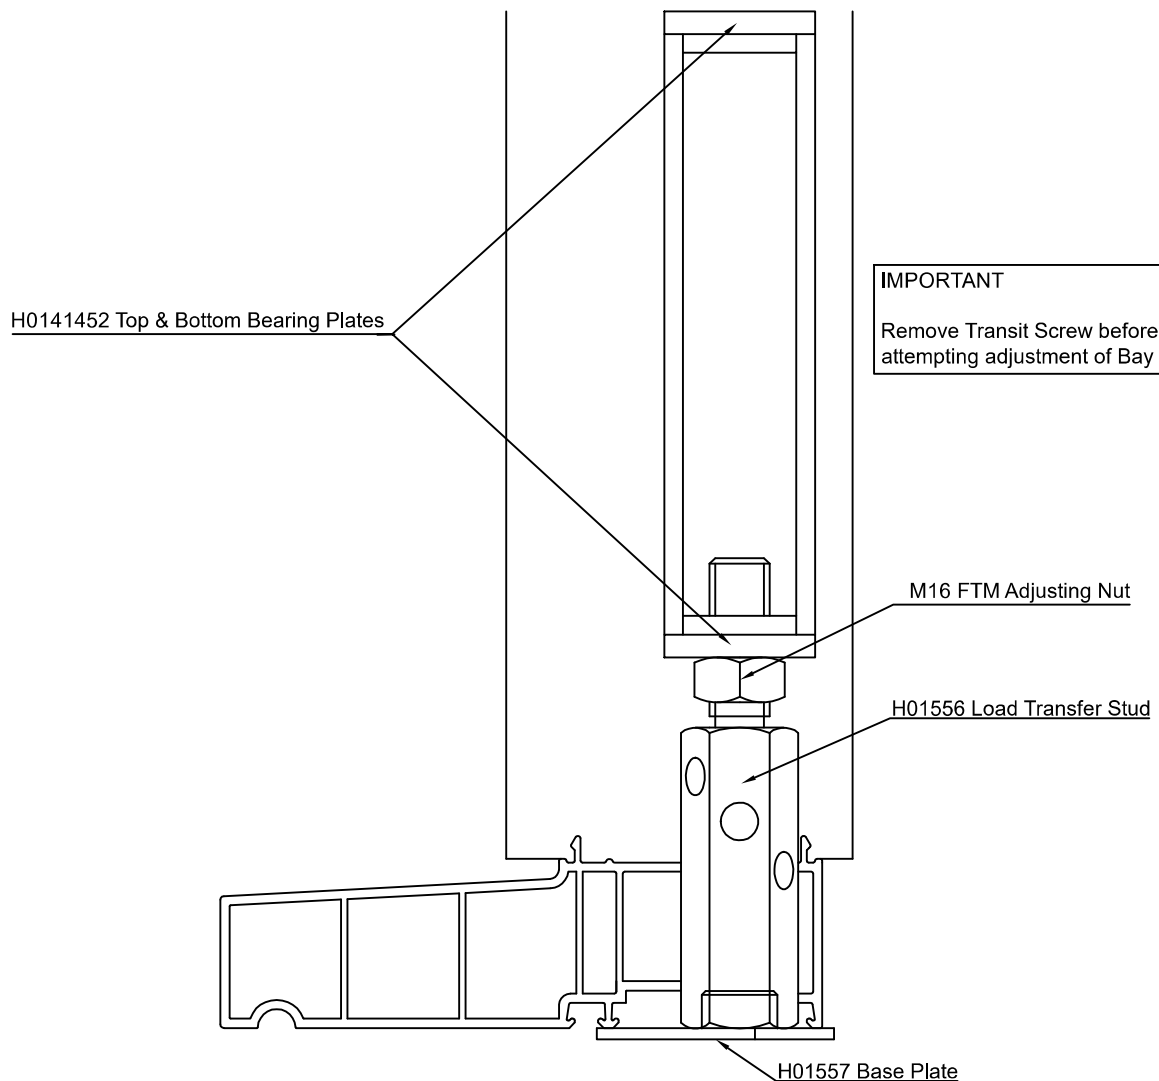

113128

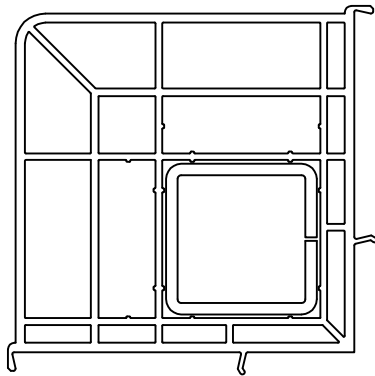

Height	Tonnes
500	3.82
600	3.76
700	3.64
800	3.56
900	3.41
1000	3.28
1100	3.05
1200	2.82
1300	2.51
1400	2.3
1500	2.14
1600	1.94
1700	1.74
1800	1.62
1900	1.47
2000	1.37
2100	1.25
2200	1.12
2300	1.01
2400	0.97
2500	0.87

Please note that the use of our adjustable bay jacking kits limits the load bearing capacity to 3 tonnes

