


Outer-Frames


Thermally efficient triple-seal PVC-U frame

Standard Outer-Frame EWS031 80mm

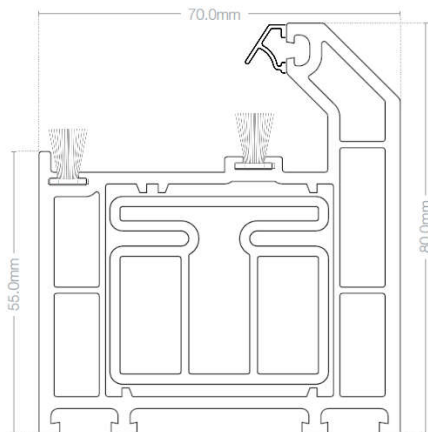


- Purpose-designed 70mm composite door frame system
- Co-extruded gasket weather-seal for perfect and reliable compression
- TWO brush-pile weather-seals in purpose designed carriers for superior draught seal
- Thermal insert reduces U-Value to 0.8W/m²k on some styles
- Compatible with Eurocell 70mm ancillary profiles including add-ons & couplers
- Plaster line clearance = 32mm

Small Outer-Frame EWS032 65mm

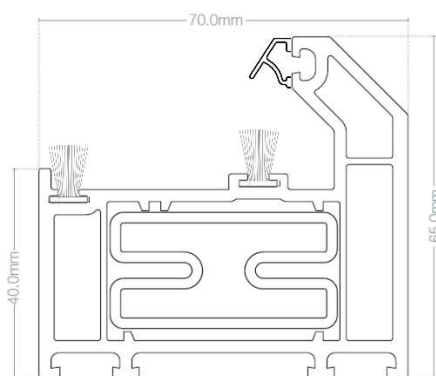


- Similar specification to standard frame
- Enables narrower doorset sizes for single doors and doors with combination frames
- Reduced plaster line clearance = 17mm
- Used as standard threshold for fully welded PVC-U frames

Frame Add-Ons

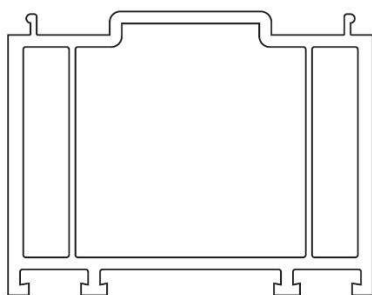

50mm frame extension
EWS 126

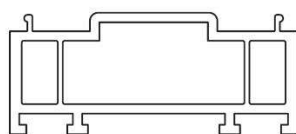

25mm frame extension
EWS 106



15mm frame extension
EWS 116

- Add-on profiles can be used singularly or in combination to provide the following size options:
 - 15mm; 25mm; 30mm (2x 15mm); 40mm (15mm + 25mm); 50mm; 65mm (50mm + 15mm); 75mm (50mm + 25mm); 100mm (2x 50mm)