




THIS DRAWING AND SPECIFICATIONS ARE THE PROPERTY OF THE PERFORMANCE WINDOW GROUP. THEY ARE ISSUED IN STRICT CONFIDENCE AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR MANUFACTURING WITHOUT WRITTEN PERMISSION.

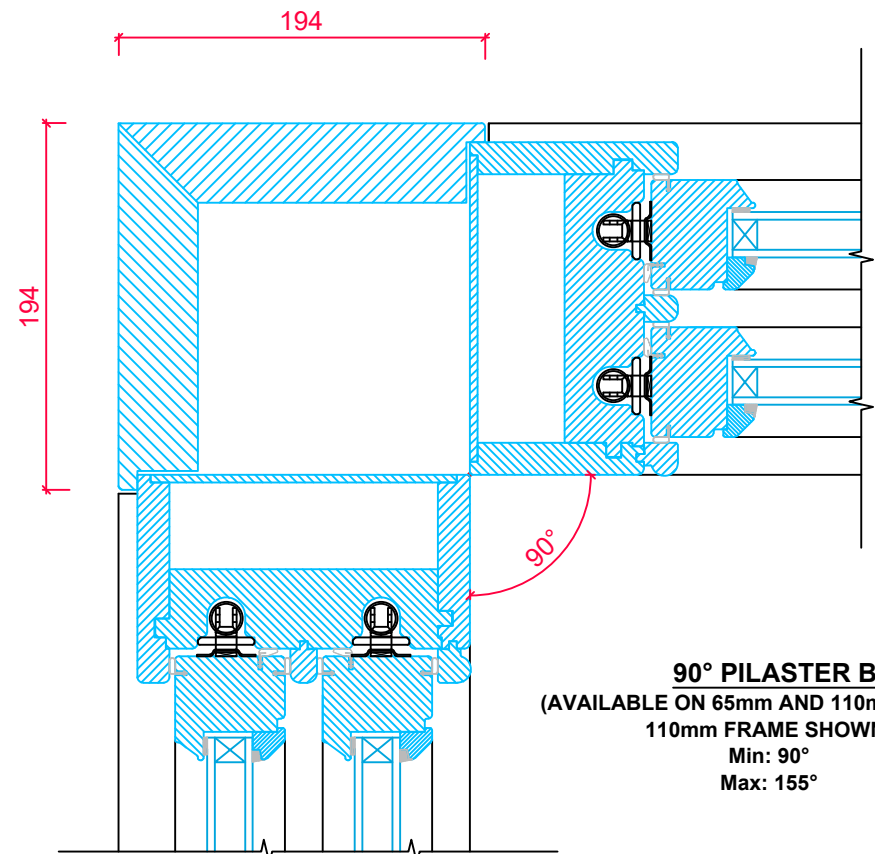


90° PILASTER BAY
(AVAILABLE ON 65mm AND 110mm FRAME -
110mm FRAME SHOWN)
Min: 90°
Max: 155°

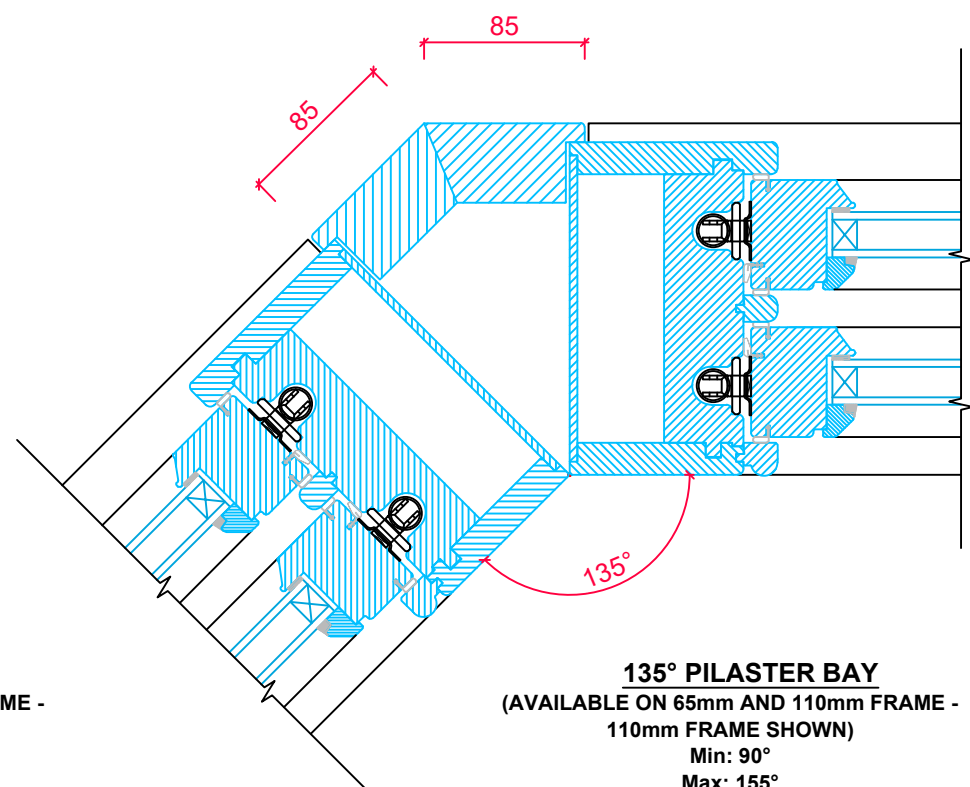


135° PILASTER BAY
(AVAILABLE ON 65mm AND 110mm FRAME -
110mm FRAME SHOWN)
Min: 90°
Max: 155°

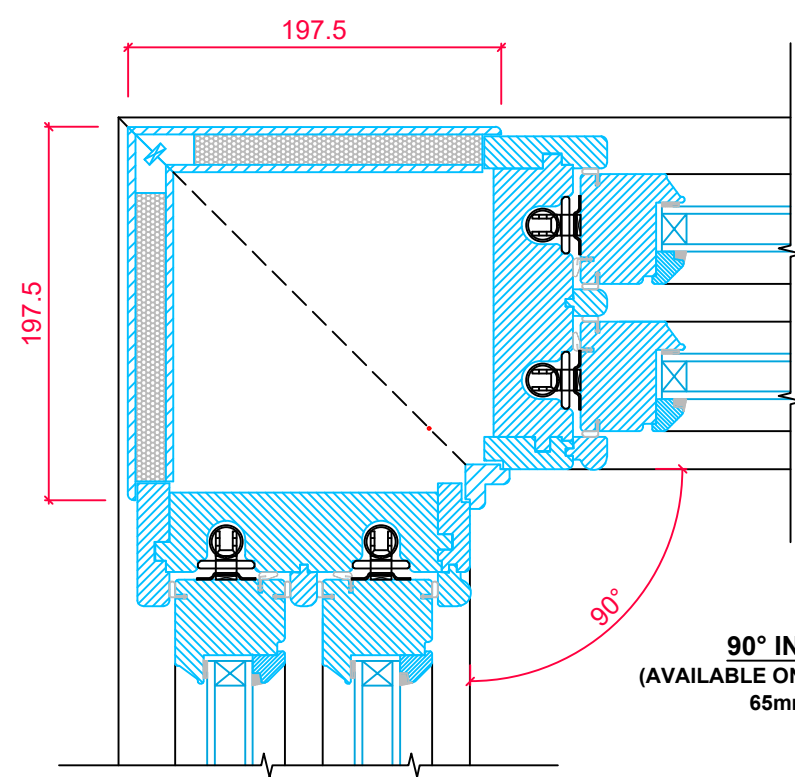

90° INTEGRATED BAY
(AVAILABLE ON 65mm AND 110mm FRAME -
65mm FRAME SHOWN)
Min: 90°
Max: 155°

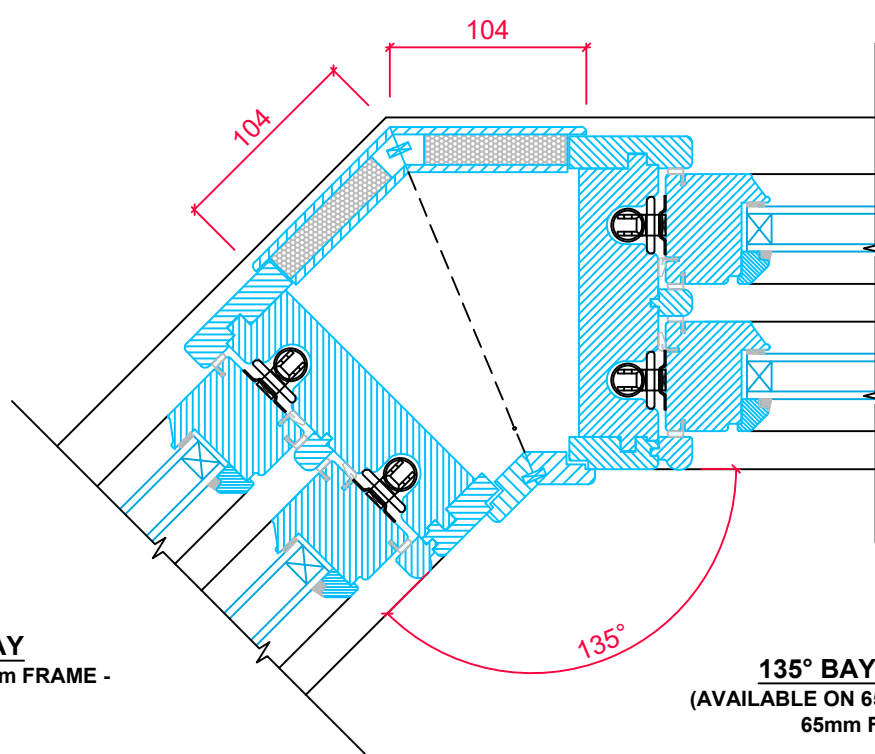

135° BAY INTEGRATED BAY
(AVAILABLE ON 65mm AND 110mm FRAME -
65mm FRAME SHOWN)
Min: 90°
Max: 155°

 TIMBER WINDOWS EST. 2004	TOLERANCES UNLESS OTHERWISE SPECIFIED	PRODUCT RANGE: 176mm HIDDEN SPRING (<i>Bevel</i>)			
	ALL DIMENSIONS IN MM ALL LINEAR DIMENSIONS ±0.4 ALL ANGLE DIMENSIONS ±0.5° BREAK ALL SHARP EDGES 0.5	TITLE HORIZONTAL SECTION DETAIL - CORNER POSTS			
		DRAWN BY: AP	DATE DRAWN: 01/10/2018	SCALE: 1:4	Rev B