



TIMBERWINDOWS



HOMEOWNERS

AFTERCARE GUIDE



TIMBER
WINDOWS

AWARD WINNING
hand-made
TIMBER WINDOWS
& DOORS

Thank you for purchasing your new timber windows and doors.

In order that they continue to meet your expectations, it is essential they are properly cared for and given a little TLC. This simply means some minimal maintenance and checks on a regular basis.

Your products are provided with a set of comprehensive warranties requiring basic checks to be carried out, as contained in this easy-to-follow guide; and our showroom can provide you with any further advice or guidance required so that you may continue to enjoy your products fully.



CONTENTS

PAINTWORK	4
FULL REDECORATION	6
BRUSH APPLICATION METHODS	6
GLASS	7
HARDWARE & HINGES	8
BRASS HARDWARE FINISHES	9
OTHER HARDWARE FINISHES	10
SAMUEL HEATH	11
POLISHED & STAINLESS STEEL HARDWARE	12
PVD COATED STAINLESS STEEL HARDWARE	13
PERIOD IRONMONGERY	15
KABA EURO PROFILE CYLINDER	16
PRODUCT GUARANTEES	18

CARE & MAINTENANCE GUIDELINES



PAINTWORK

Your windows and doors have been finished in the factory, firstly with a base coat primer, followed by two coats of a microporous paint system. This paint or stain coating system should fully protect the products for twelve years (paint) and up to six years (stain) - One year on externally stain finished oak. These time periods will depend, however, on elevation and the exposure (climatic conditions) to which your windows and doors are subjected.



It is vital the integrity of the paint/stain coating system is maintained and to do this it is important to wash the surface at least once a year – or more frequently in high exposure or coastal locations – to remove any surface pollution, bacterial growth and so on. This should be done using a mild detergent solution to remove dirt and grease and then a rinse with clean water.

Cleaning will remove dust, insects and other contaminants, which can form a base for algae and fungi growth. Do not use hose pipes, power washers or similar.

If any damage to the coating system is detected during the regular inspection periods described above, the affected areas must be touched up without delay and as described below to maintain the integrity of the coating system.

Once the paintwork is clean, the following steps should be taken. The coating surface should be inspected for mechanical damage and affected areas repaired using the following procedure. Lightly sand down the damaged areas with a fine-grade abrasive paper, such as p240. Wipe over prepared area using a clean, damp cloth to remove dust and allow to dry thoroughly. Apply a coat of paint/ stain in the appropriate colour to the damaged area. Allow to dry for four hours, then apply a second coat.

If the damaged area is widespread, it is recommended that the whole frame or component part is lightly abraded and repaired as described above, with the second coat applied to the complete frame or the component part.

Where damage has affected the full depth of the coating system - such as a deep cut or gouge – the full system requires repair. Sand down the damaged area first with a medium-grade sand paper and then a fine-grade abrasive paper. Internally, fill gouges with a multi-purpose filler such as decorator's caulk; the filled area should be wiped level with a damp cloth before it sets. Once set it can be painted as described above. For external gouges, fill the area using 2 pack wood filler, with the surface of the filler left slightly proud. This should then be sanded flush (using p120 - p180 grade sandpaper) and painted. If any wood surface has been exposed during sanding, two coats of paint must be applied.



Where the coating system is intact, but requires a cosmetic coat, the following procedure should be followed. Lightly sand down the damaged area with a fine-grade abrasive paper. Wipe over the prepared area using a clean, damp cloth to remove dust and allow to dry thoroughly. Using a good quality synthetic brush, designed for use with microporous acrylic paints apply a single coat in the appropriate opaque colour.

Allow to dry for four hours.

FULL REDECORATION

We recommend that Teknos branded Paints or Stains are used when redecorating to achieve a closer match to the original finish; however most good quality micro-porous paint or stain systems will be suitable following the manufacturer's instructions. Teknos paint will adhere to the original paint after a light sanding with a fine (220/240 grit) paper. Wash down after sanding and allow drying off before application of any paint/stain.

Apply two coats in accordance with the manufacturer's recommendations and use a good quality long haired synthetic brush, paying particular attention to horizontal surfaces, cills and bottom rails.



BRUSH APPLICATION METHODS

Waterborne and solvent borne materials require different brushing techniques, due to the faster drying and reduced flow of waterborne coatings. The quality of the brush is very important to get an optimum finish and prior to application, thoroughly wet the brush with water, ensuring that the base of the bristles (the heel of the brush) is fully wetted.

Long haired synthetic brushes give the best application properties and are readily available from most DIY outlets.

An even coating of film is important for durability and also for appearance, particularly in the case of translucent wood stain. With practice, an even coat can be applied quickly, following a three stage application technique: Load the coating generously and disperse quickly over the surface. Even out the coating with light diagonal cross strokes. Do not over brush; the coating will flow and level naturally. Finish with light brush strokes in the direction of the grain.

When painting joinery, apply and finish each section systematically. This means painting a window or door, one component at a time. E.g. Top Rail, followed by a Stile, followed by the Bottom Rail etc. When applying darker opaque colours over previously applied lighter shades, a base coat of the final colour will help achieve an even finish colour.

Wash out brush with a mild detergent solution (e.g. washing up liquid) and rinse with clean water.



GLASS

We advise cleaning glass using a soft cleaning sponge with warm soapy water or a quality glass cleaner, followed by a rinse off with clean water. Hard tools should not be used to scrape glass clean.

To prevent scratching, the use of a soft cloth, gloves and/or removal of all hand jewellery is recommended.

HARDWARE & HINGES

WINDOW HINGES

All hinges with sliding shoes, which travel along the track, need to be kept clear of dirt, debris and other obstructions. Use a soft damp cloth with a mild solution of warm soapy water to clean the friction hinges, then dry thoroughly afterwards. For optimum performance lubricate all pivot points with light (low viscosity) engineering oil with corrosion inhibitors such as 3 in 1 Oil. Wipe away excess; one drop per pivot is sufficient.

DOOR HINGES

All hinges should be lightly lubricated at least twice per year using 3 in 1 oil. Cleanse with a soft damp cloth and a mild solution of warm soapy water to remove any dust or grime. Take care not to scratch the surface and then dry thoroughly afterwards.

LOCKING MECHANISMS

Locking mechanisms and strikers should be wiped down with a soft cloth and all moving parts, lock face and keeps lubricated with a light (low viscosity) engineering oil with corrosion inhibitors such as 3 in 1 Oil. Wipe away any excess.

HANDLES AND HARDWARE

GENERAL MAINTENANCE

Please avoid using any form of chemical cleaner, e.g. oxalic acid or aerosol sprays to clean products, as this can permanently damage any finish. We recommend regularly oiling any moving parts on all products to ensure they perform to their full capacity. Wiping over the surface area of your products from time to time with an oily cloth will also remove any harmful deposits that build up on the surface and will aid protection from environmental factors. We recommend using a 3-in-1 oil.

If the operation of handles becomes stiff it may be that some adjustment is required to the locking cams. This should be carried out as soon as possible.



BRASS HARDWARE FINISHES

SPECIFIC MAINTENANCE

LACQUERED BRASS

Lacquered brass is protected with a clear lacquer. Do not try to clean lacquered brass hardware with metal polish or other abrasive cleaners, as this may remove the coating, after which discolouration will quickly occur. Over time the protective lacquer will be damaged by rings, keys and so on, and this will result in the brass substrate becoming discoloured. The rate at which this breakdown takes place will be accelerated by atmospheric conditions, such as sea air or pollution.



UNLACQUERED POLISHED BRASS

Unlacquered brass will naturally age through oxidation, giving the product added character. However, if desired this finish can be maintained to a bright 'polished' finish with periodic polishing. To achieve this, please use a dry cloth or alternatively Brasso can be used to assist with the cleaning of solid brass products.

PVD BRASS

We recommend avoiding the use of any chemicals or cleaning products on this finish.

AGED BRASS

This finish will continue to oxidise and age as it is an unlacquered finish, meaning the finish will darken over time. If the product becomes tarnished or too dark, it can be polished on all surface areas to enhance the finish. To restore and brighten the finish, we recommend polishing with a dry cloth or alternatively using Brasso, which assists with the cleaning of solid brass products.

Discolouration of brass hardware is not covered by our warranty.

OTHER HARDWARE FINISHES

BLACK / PEWTER FINISH

These finishes are extremely low maintenance. An oily cloth can be used to wipe over the product from time to time. Minor scratches may occur with general wear and tear of your product.



BRONZE FINISH

We recommend that the ironmongery is wiped with a lightly oiled cloth once a month. This will remove harmful deposits and restore it to its original condition. Never use any form of metal cleaner or aerosol spray. Minor scratches may occur with general wear and tear of your product.

POLISHED NICKEL, POLISHED CHROME AND SATIN CHROME FINISHES

We recommend avoiding the use of any chemicals or cleaning products on these finishes as it may affect the plated finish. An oily cloth can be used to wipe over the product from time to time to remove any harmful deposits that build up on the surface of your product, this will also aid protection against any environmental elements. A dry cloth can also be used to wipe over the product and reduce finger marks. Minor scratches may occur with general wear and tear of your product.



SAMUEL HEATH

SPECIFIC MAINTENANCE

To help maintain the high quality finish, please clean with a soft damp cloth. Do not use abrasive polish or cleaners. Stains may be removed using undiluted washing up liquid.

Nickel finishes will provide a wonderfully rich lustre and over time develop an individual patina of their own, often what is called a 'living finish'. However all finishes do require regular care. It is important to clean finishes after use to prevent tarnishing. Water should be dried off and prevented from building up and forming hard water spots (which if left are difficult to remove). Such care and attention will also help prevent lime scale build-up. Soap and water is all that is needed to clean Samuel Heath products - the secret is to clean your brassware regularly. Please note that any finish other than chrome plate will be affected in marine or coastal environments. Non lacquered brass is hand polished and if cleaned regularly with a brass cleaner will maintain a pure brass finish.

Please note that all Samuel Heath finishes, except Chrome Plated are special finishes, designed to wear for a rustic, period look and are therefore not covered under our ironmongery warranty.



CARE AND MAINTENANCE GUIDE

316 POLISHED AND SATIN STAINLESS STEEL HARDWARE

MONTHLY CARE AND MAINTENANCE

- Clean regularly with a soft, dry cloth or duster.
- Rubbing or wiping should be carried out in the direction of the polish/finishing lines, not across them.
- Product should be washed monthly using a soft cloth and mild soapy water then dried immediately with a clean, soft cloth - especially if fitted on or near the coast.
- Fingerprints can be removed by washing product as above.



PLEASE NOTE

- **DO NOT** use oily rags or greasy cloths when wiping the product surface.
- **DO NOT** use bleach, abrasive cleaners, caustic or acid based cleaning materials, or detergents containing chloride, or any other strong household cleaning products.
- **DO NOT** use abrasive materials, files or other hard objects against the product surface.
- This product should be protected from dust and dirt during any construction work.



PVD COATED STAINLESS STEEL HARDWARE

WHAT IS PVD COATING?

PVD stands for Physical Vapour Deposition. Also known as 'thin-film' coating, PVD coating is a process in which the hardware is placed inside a vacuum chamber and given a negative charge, a solid material (the coating) is then vapourised in this vacuum and given a positive charge forcing it to deposit atom by atom onto the surface of the hardware.

The coating is not simply layers of metal, the material is deposited atom by atom providing an ultra-thin, highly accurate and extremely strong coating. It also provides a much more uniform appearance and finish than traditional coating methods.

As the coating is very thin it enables the texture of the underlying metal to still be visible and felt. So for a satin finished product we use a base material of satin stainless steel and apply the PVD coating to it, or for a polished finish we use polished stainless steel as the base material.

To help you care for PVD finished products please follow the below guidelines:

MONTHLY CARE AND MAINTENANCE

- Clean regularly with a soft, dry cloth or duster.
- Rubbing or wiping should be carried out in the direction of the polish/finishing lines, not across them.
- Product should be washed monthly using a soft cloth and mild soapy water then dried immediately with a clean, soft cloth - especially if fitted on or near the coast. Fingerprints can be removed by washing product as above.

PVD COATED STAINLESS STEEL HARDWARE

Please Note

- **DO NOT** use oily rags or greasy cloths when wiping the product surface.
- **DO NOT** use bleach, abrasive cleaners, caustic or acid based cleaning materials, or detergents containing chloride, or any other strong household cleaning products.
- **DO NOT** use abrasive materials, files or other hard objects against the product surface.
- This product should be protected from dust and dirt during any construction work.
- PVD coatings may fingerprint so we suggest during installation of the product that you handle it with clean gloves or cloths to guard against stains or fingerprints. Fingerprints can be removed by washing product with a mild soap and water solution, then dried.
- If a softer metal such as a ring or a key marks the surface, it is possible some of this metal.

Specific stainless steel renovation kits are available from your local showroom.





DRAUGHT SEALS

Draught seals should be checked to ensure that they are seated properly in the rebate. The seals should also be checked periodically for splits or tears and any damaged seals replaced. After checking, the seals should be wiped clean with a warm, damp cloth, moistened with soapy water, and dried thoroughly.

CAUTION

We ask that care is always taken not to scratch or damage the surface of the window hardware during maintenance / cleaning. Always use soft cloths for cleaning. Do not use wire wool or scouring agents. All residues of old lubricants should be removed prior to maintenance. Adjustment of hardware will keep your windows and doors in excellent working order and ensure trouble free operation.


CARE AND MAINTENANCE GUIDE

EURO PROFILE CYLINDER

KABA EURO PROFILE CYLINDER


REGULAR MAINTENANCE:

The benefit of regular maintenance of a locking system is generally underestimated, even though essential for continuous functioning of each locking mechanism. Regular and preventative maintenance should be carried out using KABA cleaner spray or 3 in 1 oil. This will aid the cleaning and maintenance of cylinder locks and for protect against corrosion.

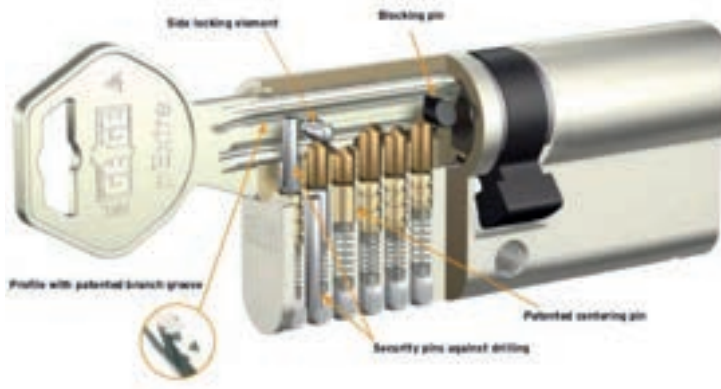

THUMBTURN CYLINDER OPERATION:

The thumbturn rotor is sprung-loaded, to ensure the cylinder can be operated from the inside in the event of the cylinder being attacked/snapped.

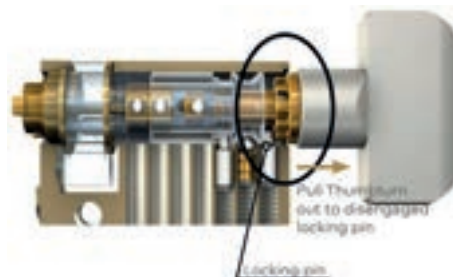

The cylinder has been designed to ensure any such attack leaves the person unable to operate the cylinder to gain access to the property. This is achieved by deadlocking the cam in the event of the front end of the cylinder being snapped at point of the sacrificial cut (external). This pin ensures the cam cannot be manipulated to disable the locking mechanism on the door.

However, to ensure there remains a means of egress to any occupants, the deadlocking pin can be withdrawn by pulling the thumbturn outwards and rotating to unlock the door.



NOTE:

The thumbturn should not be used as a means to pull open the door. This will put undue stress on the cylinder which is not conducive to the cylinder operating at its optimum performance.



PRODUCT GUARANTEES

- All finishing warranties are subject to the environmental conditions of the site location, and adherence to the care and maintenance procedures laid down by manufacturers under the conditions of sale.
- Colour variations in timber may occur as it is a natural product.
- PWG Trading Ltd reserves the right to change specifications without prior notice.

Fungal & Insect



**30 YEARS
GUARANTEE**

TIMBER

For a period of 30 years from the date of delivery, Timber Windows warrants that the goods will be free of rot or fungal infection under normal conditions, and that every reasonable effort has been made to ensure the use of good quality materials, and where care and maintenance as per this document has been carried out satisfactorily.

Sealed Unit



**10 YEARS
GUARANTEE**

SEALED UNIT

For a period of 10 years from the date of delivery, Timber Windows warrants that double glazed sealed cavity units, supplied factory fitted shall be fit for purpose for which goods of the type are normally used under normal conditions, and that every effort has been made to ensure the use of good quality materials, and where care and maintenance as per this document has been carried out satisfactorily. 5 years for 14mm double glazed units.

Hardware



**10 YEARS
GUARANTEE**

HARDWARE

For a period of 10 years from the date of delivery, Timber Windows warrants that all hardware that is supplied factory fitted shall be fit for purpose for which goods of the type are normally used under normal conditions, and that every reasonable effort has been made to ensure the use of good quality materials, and where care and maintenance as per this document has been carried out satisfactorily. Please refer to main body of this document for specific guidance in relation to Period Ironmongery.

Workmanship



**10 YEARS
GUARANTEE**

WORKMANSHIP

For a period of 10 years from the date of delivery, Timber Windows warrants that goods supplied will be free from defects as a result of manufacturing processes when used under normal conditions, and where care and maintenance as per this document has been carried out satisfactorily.

Paint



**12 YEARS
GUARANTEE**

Stain



**UP
TO 6 YEARS
GUARANTEE**

PAINT & STAIN

For the decorative finish on products supplied factory finished, Timber Windows warranty shall be 12 years for paint finished items and up to 6 years for stain finished items (1 year on externally stain finished oak) from the date of delivery, in normal use and moderate weather conditions, and where care and maintenance as per this document has been carried out satisfactorily.



**IT'S THE DETAIL THAT MAKES
THE DIFFERENCE**

www.timberwindows.com

