

Suitable for medium security residential applications this garage door is individually made-to-measure to specific user requirements. The Compact Garage Door has been designed specifically for openings where room above or to the side of an opening is limited. Remote control operation with safety features meeting BS EN 13241-1 and manual override all as standard.



Curtain Slat

Aluminium double skinned polyester powder coated slat with polyurethane foam insulating core.

Colours: white, brown, beige, blue, red, green, black, light grey, metallic silver, anthracite grey, and various wood effect slats as standard.

Blind Surface :: 54mm
Weight per m² :: 4.2kg
Maximum Width :: 3500mm
Maximum Surface :: 9m²

Enclosure / Housing

Manufactured from roll formed aluminium with a stove-enamelled finish. End caps are pressure moulded aluminium alloy.

Colours: White or brown as standard. Other colours available on request.

Guide Channels / Bottom Slat

Extruded aluminium with weather seal. Guide channel depth is 68mm.

Colours: White or brown as standard. Other colours available on request.

Operation


Electric: Single phase tubular motor & remote control by handset. Limitation of forces and anti-fall back devices fitted as required.

Note: Manual operation by spring and lock is available but not common for the T55 profile since garage door openings require a large number of slats.


The T55 can be tailored to requirements and installed as a standard security shutter. A scaled down Budget version is also available.

Shutter Height (mm)	Box Size (mm)
1400	165
1700	180
2400	205
2900	250

Front Face & Profile View

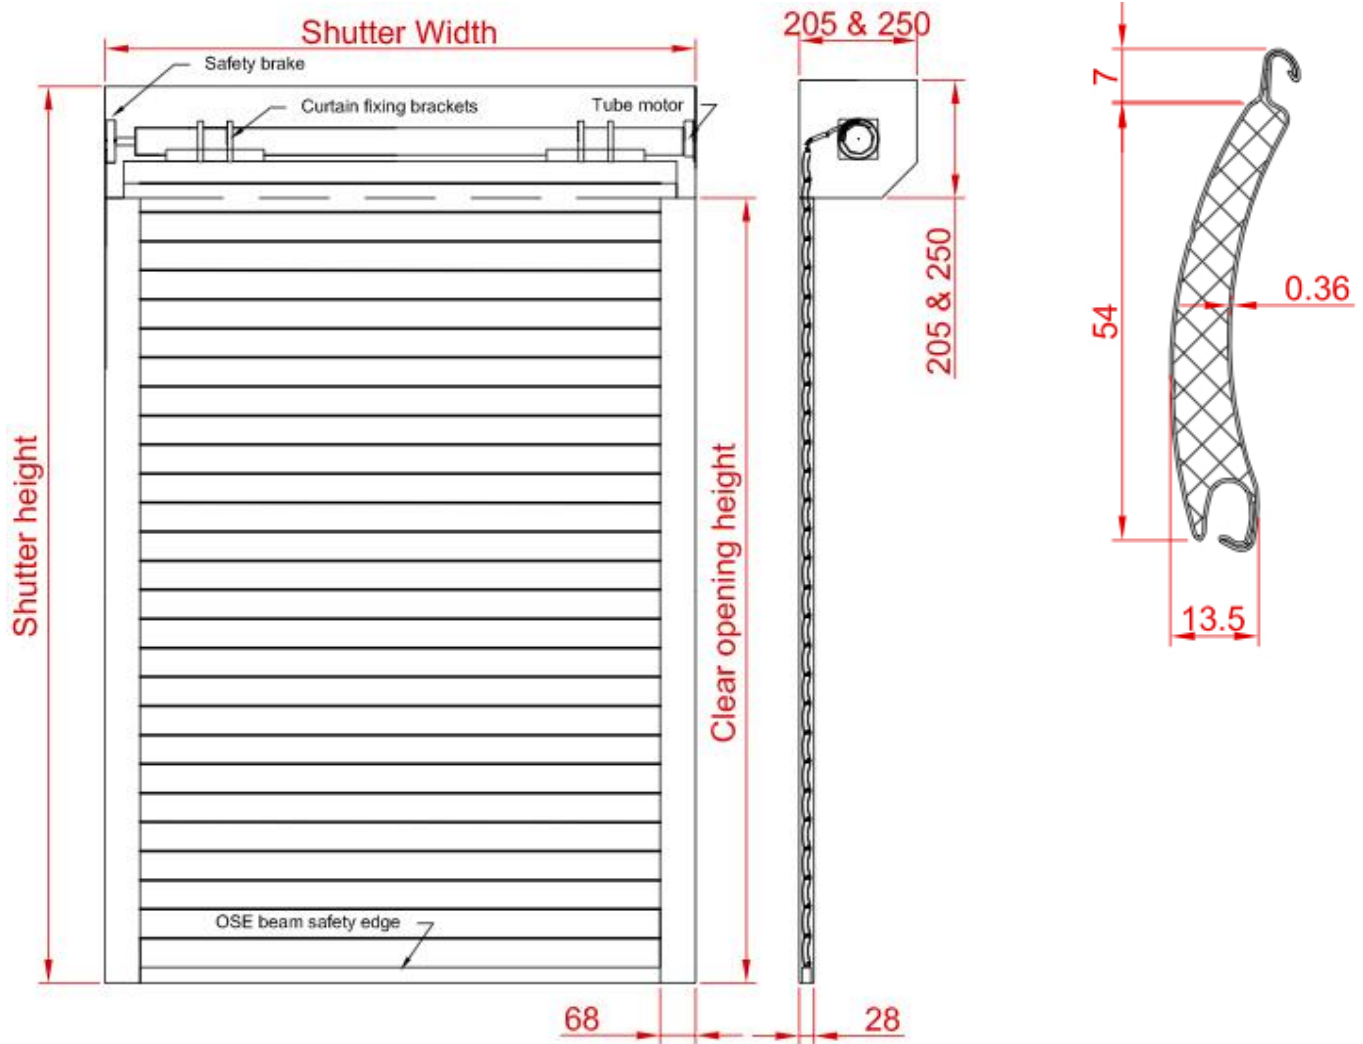

Fixing Options

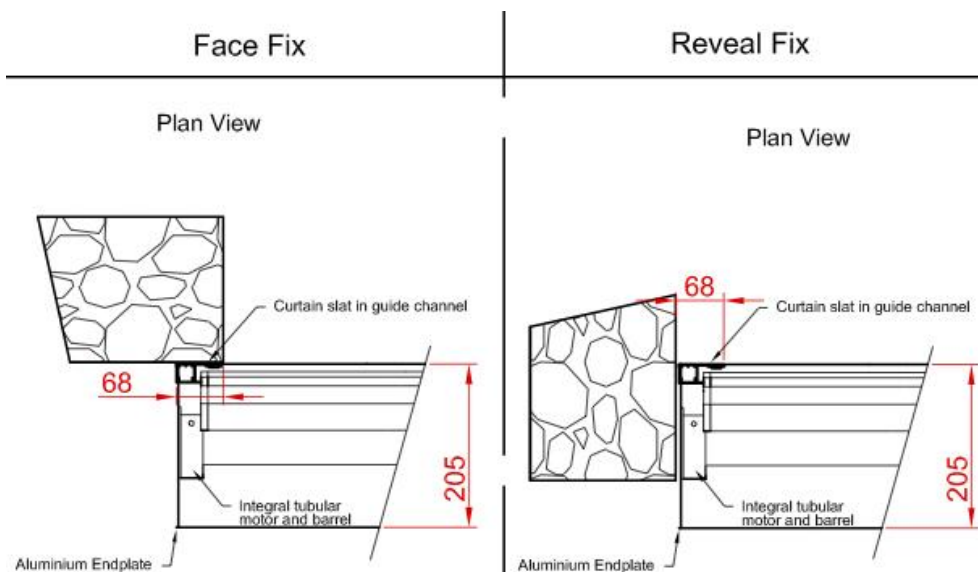

Guide Options

