


90° - 126° VARIABLE ANGLE BAYS

Description - Post that connects the windows in a bay configuration-able to be angled as required between 90° and 126°

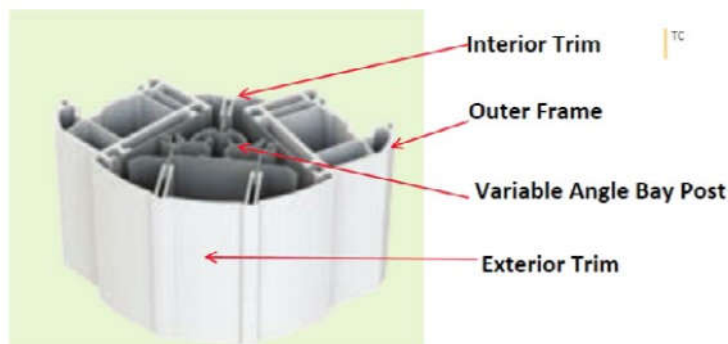

Product Codes:

WWL121 (90° - 126° Variable Angle Pole)

WWL134 (Frame Adaptor)

DBI.**FLF** *Internal Trim)

DBO.**FBS** (Exterior Trim)

Please note the highlighted part of the code is colour dependent.

* Jack C jacking post if required (Reinforcing deduction 100mm)

bxx (cm²) = 16.94
byy (cm²) = 10.16

Frame deductions PER SIDE

ANGLE (deg)	DEDUCTION (mm)	ANGLE (deg)	DEDUCTION (mm)
91	4.5	110	10.8
95	6.2	115	12.3
100	7.8	119	13.4
105	9.3		

Set your required angles between 90° and 126°

See how to measure your bay deductions on page 55

90° - 126° VARIABLE ANGLE BAYS

How to process on Window Designer:

Set poles to 'SPLAY'.

Once the above has been carried out, WD will automatically default to the WWL121 post (for angles 91° - 119° Variable Angle Pole).

How to Process a Stock order on Window Designer:

Format the extra exactly as shown below. However you will need to adjust metre size, and select a colour for the trims too.


First select general extras when in the wall view.

Material List	Qty	Size (H)	Type	Category	Product Code	Description	Finish1	Finish2
OPTIONED	1	1	Material List	Bay/Down/Cons	WWL121	All Pole	(none)	(none)
OPTIONED	1	1	Material List	Bay/Down/Cons	WWL124	Universal Adapter	(none)	(none)
OPTIONED	1	1	Material List	Bay/Down/Cons	DBI.PLF	Deco Inner Trim Full LF	Aw/ White	(none)
OPTIONED	1	1	Material List	Bay/Down/Cons	DBI.PES	Deco Outer Trim Full LF	Aw/ White	(none)


90° - 126° VARIABLE ANGLE BAYS

B WWL121 VARIABLE

Covering angles 90°-126° for 70mm

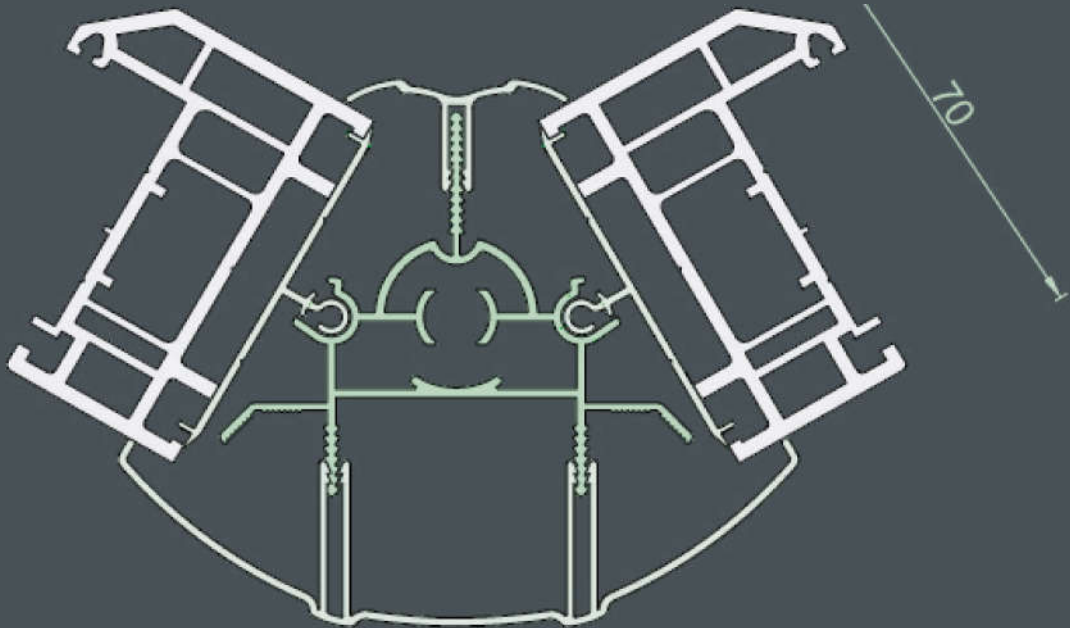

NAME	WWL121
IXX (cm ⁴)	16.94
IYY (cm ⁴)	10.16
FRAME DEDUCTION	Varies - see website
EXTERNAL TRIM	DB0120
INTERNAL TRIM	DBI/PILDT - see website
UN-FOILED	YES
FOILED	YES
JACK-ABLE	JACK-2

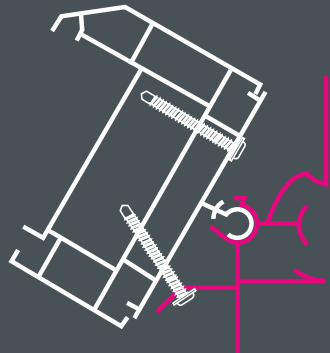

Screw fix adapter to frame. When in position screw fix from outside face to secure final location

U	J	70 mm	76 mm	R	D/P
Universal Product	Jack-able System	70mm System	75/76mm System	Reversible	DBI/PILDT

All our Jacks are tested to 9 Tonnes and are CE approved No. 0086-CPR-614908

HEIGHT	LOAD BEARING
900	Capped at 2 Tonnes
1200	
1500	
1800	
2100	
2400	1.6 Tonnes

